

# A New Skew Linear Interpolation Characteristic Difference Method for Sobolev Equation

Yang Zhang <sup>+</sup>

School of Mathematical Science and LPMC, Nankai University, Tianjin, 300071, China

(Received February 10, 2010, accepted May 22, 2010)

**Abstract.** A new kind of characteristic-difference scheme for Sobolev equations is constructed by combining characteristic method with the finite-difference method and with the skew linear interpolation method. The convergence of the characteristic-difference scheme is studied. The advantage of this scheme is very effectual to eliminate the numerical oscillations and have potential advantages in other equations.

**Keywords:** Sobolev equation; characteristic-difference scheme; skew linear interpolation; convergence

## 1. Introduction

Many mathematical physics problems can be described by Sobolev equations, such as in fluid flow, heat diffusion and other areas of application. The primal numerical solution of using finite difference method and finite element method for one dimensional Sobolev equations is in [1],[2]. In the year of 1982, Douglas and Russel<sup>[3]</sup> presented the method of characteristics with finite element or finite difference procedures to solve convection diffusion equations, and then You<sup>[4]</sup> applied this characteristics difference element method to solve Sobolev equation. During the computation, this method used the algebraic interpolation of the last time step, thus for some problems the stability of the computational scheme is not good enough, even can cause some numerical oscillation. To avoid happen the phenomena of numerical oscillation, Qin<sup>[5]</sup> introduced a new linear interpolation method (see figure 1 ) in solving convection diffusion problem: use the values of four points  $(x_{j-1}, t_{n-1}), (x_j, t_{n-1}), (x_{j-1}, t_n), (x_j, t_n)$  to make bilinear interpolation for the value of point  $P_*$ .

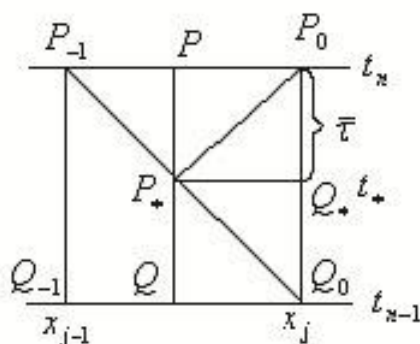


Figure 1. Bilinear interpolation

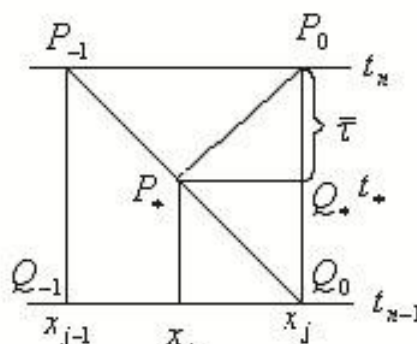


Figure 2. Skew linear interpolation

In this paper, we present a improved characteristic-difference method of [5](see figure 2) in solving the Sobolev equations: only use the values of two points  $(x_j, t_{n-1}), (x_{j-1}, t_n)$  (see figure 2) to make Skew linear interpolation of point  $P_*$ . Compare with the method in [3],[4], our new method show itself more stability. Compare with [5], our method is easier to realize in algorithm. This method can also be applied to solve

<sup>+</sup> Corresponding author. E-mail address: [zhangyang@nankai.edu.cn](mailto:zhangyang@nankai.edu.cn)

convection dominated diffusion equations.

## 2. Construction of the finite difference scheme

Consider one dimensional initial-boundary Sobolev equations:

$$\begin{cases} c(x) \frac{\partial u}{\partial t} + b(x) \frac{\partial u}{\partial x} - \frac{\partial}{\partial x} \left( a(x) \frac{\partial u}{\partial x} + d(x) \frac{\partial^2 u}{\partial x \partial t} \right) = f(x, t), (x, t) \in (0, L) \times (0, T] \\ u(x, 0) = u_0(x), x \in (0, L) \\ u(0, t) = g_0(t), u(L, t) = g_1, t \in [0, T] \end{cases} \quad (1)$$

where  $a(x), b(x), c(x), d(x) \in C[0, L]$ ,  $f(x, t) \in L^2([0, L] \times [0, T])$ , and there exists positive constants  $a_0, b^*, c_0, d_0$ ,  $a(x) \geq a_0 > 0$ ,  $|b(x)| \leq b^*$ ,  $c(x) \geq c_0 > 0$ ,  $d(x) \geq d_0 \geq 0$ , for  $\forall x \in [0, L]$ .

The solvability and uniqueness of (1) can be found in [2]. We assume that (1) has a unique solution and have some necessary smoothness. Denote the characteristic direction of operator  $c(x) \frac{\partial u}{\partial t} + b(x) \frac{\partial u}{\partial x}$  to be  $\lambda = \lambda(x)$ , and then the characteristic derivative is defined by

$$\frac{\partial}{\partial \lambda} = \frac{1}{\varphi(x)} \left[ c(x) \frac{\partial}{\partial t} + b(x) \frac{\partial}{\partial x} \right],$$

where  $\varphi(x) = [b(x)^2 + c(x)^2]^{1/2}$ . Therefore, the first equation of (1) can then be write as the following form:

$$\varphi(x) \frac{\partial u}{\partial \lambda} - \frac{\partial}{\partial x} \left[ a(x) \frac{\partial u}{\partial x} + d(x) \frac{\partial^2 u}{\partial x \partial t} \right] = f(x, t), \quad 0 < x < L, 0 < t < T. \quad (2)$$

In figure 2, suppose the values on  $n-1$  time step is either initial value or already be computed by initial value. When  $b(x) > 0$ , the characteristic direction at point  $P_0$  is the direction along  $P_0 P_*$ , where  $P_*$  is the intersection point of  $Q_0 P_{-1}$  and characteristic direction. Thus by using linear interpolation, we can use the values at points  $Q_0$  and  $P_{-1}$  to get the value at point  $P_*$ , and then applying finite difference method and characteristic method to construct an implicit difference scheme. The advantage of this method is: we only need to make skew linear interpolation in the segment  $Q_0 P_{-1}$ , need not do other extra work to determine the interpolation point. This technique is better than the normal finite difference method by decreasing the truncation error along time.

Take space step  $h > 0$ , mesh grid  $x_j = jh$ ,  $j = 0, 1, 2, \dots, M = [L/h]$ , time step  $\tau > 0$ , mesh grid  $t_n = n\tau$ ,  $n = 0, 1, \dots, N = [T/\tau]$ , along the characteristic line  $P_0 P_*$ , we make following finite difference discrete:

$$\left( \varphi \frac{\partial u}{\partial \lambda} \right)_j^n \approx \varphi_j \frac{u(x_j, t_n) - u(x_*, t_*)}{|P_0 P_*|}, \quad (3)$$

where  $(x_*, t_*)$  denotes the coordinate at point  $P_*$ ,  $x_* = x_j - b_j \bar{\tau} / c_j$ ,  $\varphi_j = \varphi(x_j)$ . Denote  $c_j = c(x_j)$ ,  $b_j = b(x_j)$ ,  $a_j = a(x_j)$ ,  $d = d(x_j)$ ,  $j = 1, 2, \dots, M$ . Thus from  $\frac{|Q_0 Q_*|}{|Q_0 P_0|} = \frac{|P_* Q_*|}{|P_0 P_{-1}|}$ , we have  $\bar{\tau} = \frac{c_j h \tau}{c_j h + b_j \tau}$ ,  $t_* = n\tau - \bar{\tau}$ . Therefore from

$$|P_0 P_*| = \sqrt{(x_j - x_*)^2 + \bar{\tau}^2} = \varphi_j \bar{\tau} / c_j,$$

we can get the exact expression of (3)

$$\left(\varphi \frac{\partial u}{\partial \lambda}\right)_j^n = \varphi_j \frac{u(x_j, t_n) - u(x_*, t_*)}{|P_0 P_*|} + r_j^n = \frac{c_j h + b_j \tau}{h} \frac{u(x_j, t_n) - u(x_*, t_*)}{\tau} + r_j^n, \quad (4)$$

where  $r_j^n$  is the local truncation error:

$$r_j^n = \left(\varphi \frac{\partial u}{\partial \lambda}\right)_j^n - \frac{c_j h + b_j \tau}{h} \frac{u(x_j, t_n) - u(x_*, t_*)}{\tau}. \quad (5)$$

Let  $\delta_x^-, \delta_x^+$  be the backwards and forward finite difference quotients along  $x$  direction respectively, and  $\delta_t^-$  denote the backwards finite difference quotient along  $t$  direction, denote by

$$\begin{aligned} \delta_x^- [a \delta_x u]_j^n &= \frac{1}{h} \left[ a_{j+1/2} \frac{u(x_{j+1}, t_n) - u(x_j, t_n)}{h} - a_{j-1/2} \frac{u(x_j, t_n) - u(x_{j-1}, t_n)}{h} \right], \\ \delta_x^- [d \delta_x \delta_t u]_j^n &= \frac{1}{h} \left[ d_{j+1/2} \frac{\delta_t^- u(x_{j+1}, t_n) - \delta_t^- u(x_j, t_n)}{h} - d_{j-1/2} \frac{\delta_t^- u(x_j, t_n) - \delta_t^- u(x_{j-1}, t_n)}{h} \right], \\ \tilde{r}_j^n &= - \left[ \frac{\partial}{\partial x} \left( a(x) \frac{\partial u}{\partial x} + d(x) \frac{\partial^2 u}{\partial x \partial t} \right) \right]_j^n + \delta_x^- [a \delta_x u + d \delta_x \delta_t u]_j^n. \end{aligned} \quad (6)$$

By (4)-(6), we have

$$\frac{c_j h + b_j \tau}{h} \frac{u(x_j, t_n) - u(x_*, t_*)}{\tau} - \delta_x^- [a \delta_x u + d \delta_x \delta_t u]_j^n = f_j^n - R_j^n, \quad (7)$$

where

$$f_j^n = f(x_j, t_n), \quad (8)$$

$$R_j^n = r_j^n + \tilde{r}_j^n. \quad (9)$$

Omit  $R_j^n$  in (7), and then the characteristic difference scheme of solving problem (1) can be established as follows

$$\begin{cases} \frac{c_j h + b_j \tau}{h} \frac{U_j^n - U_j^*}{\tau} - \delta_x^- [a \delta_x U + d \delta_x \delta_t U]_j^n = f_j^n, \\ U_j^0 = u_0(x_j), U_0^n = g_1(t_n), U_M^n = g_2(t_n), \\ j = 0, 1, 2, \dots, M, n = 1, 2, \dots, N, \end{cases} \quad (10)$$

where  $U_j^n$  is the numerical solution of  $u(x_j, t_n)$ .

### 3. skew linear interpolation

We first point out that  $U_j^*$  in (10) are determined by the skew linear interpolation with two points  $Q_0, P_{-1}$ , let  $U_j^* = w(x_*, t_*)$ , where  $w(x, t) = I_1 \{U_{j-1}^n, U_j^{n-1}\}(x, t)$  denotes the linear function obtained by interpolation data  $\{U_{j-1}^n, U_j^{n-1}\}$ ,  $I_1$  is the linear interpolation operator. The result is as follows:

$$I_1 \{U_{j-1}^n, U_j^{n-1}\}(x_*, t_*) = \frac{|Q_0 P_*|}{|P_{-1} Q_0|} U_{P_{-1}} + \frac{|P_{-1} P_*|}{|P_{-1} P_0|} U_{Q_0}, \quad (11)$$

where

$$\frac{|Q_0 P_*|}{|P_{-1} Q_0|} = \frac{|Q_0 Q_*|}{|Q_0 P_0|} = \frac{b_j \tau}{c_j h + b_j \tau}, \quad (12)$$

$$\frac{|P_{-1} P_*|}{|P_{-1} P_0|} = 1 - \frac{|Q_0 P_*|}{|P_{-1} Q_0|} = \frac{c_j h}{c_j h + b_j \tau}. \quad (13)$$

Apply (12), (13) to (11), then

$$I_1 \{U_{j-1}^n, U_j^{n-1}\}(x_*, t_*) = \frac{b_j \tau}{c_j h + b_j \tau} U_{P_{-1}} + \frac{c_j h}{c_j h + b_j \tau} U_{Q_0}, \quad (14)$$

i.e.

$$U_j^* = \frac{b_j \tau}{c_j h + b_j \tau} U_{j-1}^n + \frac{c_j h}{c_j h + b_j \tau} U_j^{n-1}. \quad (15)$$

Apply (15) to (10), we obtain a computational scheme. When  $h = O(\tau)$ , the coefficient matrix formed by difference scheme (10) is strictly diagonal dominated, therefore (10) has a unique solution.

#### 4. convergence analysis

Let  $W^{m,p}$  denotes Sobolev space with norm  $\|\cdot\|_{m,p}$ . For grid function  $v, w$ , define inner product and norm:

$$(v, w) = \sum_{j=1}^{M-1} v_j w_j h, \|v\|^2 = (v, v),$$

$$[v, w] = \sum_{j=0}^{M-1} v_j w_j h, \left\| [v] \right\|^2 = [v, v],$$

$$[a \delta_x v, \delta_x w] = \sum_{j=0}^{M-1} a_{j+1/2} \delta_x v_j \delta_x w_j, \left\| [a^{1/2} \delta_x v] \right\|^2 = [a \delta_x v, \delta_x v].$$

By Taylor formula<sup>[4]</sup>, when  $u \in W^{2,\infty}(0, T; W^{4,\infty}(0, L))$ ,

$$|\tilde{r}_j^n| \leq M_1 (\|u\|_{W^{2,\infty}(W^{4,\infty})}) h^2. \quad (16)$$

Apply the Taylor formula with integral remaining term, we get

$$r_j^n = \left( \varphi \frac{\partial u}{\partial \lambda} \right)_j^n - \frac{c_j h + b_j \tau}{h} \frac{u(x_j, t_n) - u(x_*, t_*)}{\tau} = \frac{\varphi_j^2 h \tau}{2(c_j h + b_j \tau)} \left( \frac{\partial^2 u}{\partial \lambda^2} \right)_j^*, \quad (17)$$

where  $\left( \frac{\partial^2 u}{\partial \lambda^2} \right)_j^*$  is the second tangent derivative of  $u$  along segment  $P_0 P_*$  at some point of line  $P_0 P_*$ .

Combine (9), (16) and (17), then when  $u \in W^{2,\infty}(W^{4,\infty})$ ,

$$|R_j^n| \leq K_1 \left[ \left\| \frac{\partial^2 u}{\partial \lambda^2} \right\|_{L^\infty(L^\infty)} + \|u\|_{W^{2,\infty}(W^{4,\infty})} \right] (\tau + h^2), \quad (18)$$

where  $K_1$  is positive constant,  $\left\| \frac{\partial^2 u}{\partial \lambda^2} \right\|_{L^\infty(L^\infty)} = \max_{[0,L] \times [0,T]} \left| \frac{\partial^2 u}{\partial \lambda^2} \right|$ .

Denote  $e_j^n = u(x_j, t_n) - U_j^n$ , then from (7) and (10) we get the error equation

$$\begin{cases} \frac{c_j h + b_j \tau}{h} \frac{e_j^n - e_j^*}{\tau} - \delta_x [a \delta_x e + d \delta_x \delta_t e]_j^n = -R_j^n \\ e_j^0 = 0, e_0^n = 0, e_M^n = 0, j = 0, 1, 2, \dots, M, n = 1, 2, \dots, N, \end{cases} \quad (19)$$

where  $e_j^* = u(x_*, t_*) - w(x_*, t_*)$ , then from (19)

$$\frac{c_j h + b_j \tau}{h} \frac{e_j^n - e_j^*}{\tau} - \delta_x [a \delta_x e + d \delta_x \delta_t e]_j^n = -R_j^n.$$

Denote  $g_j = \frac{c_j h + b_j \tau}{h}$ , then  $g_j \geq c_0$ , ( $j = 0, 1, 2, \dots, M$ ). Multiply the last equation by  $\delta_t e_j^n h$ , and sum for  $j$  from 1 to  $M-1$ , then

$$(g \frac{e^n - e^*}{\tau}, \delta_t e^n) + [a \delta_x e^n, \delta_x \delta_t e^n] + [d \delta_x \delta_t e^n, \delta_x \delta_t e^n] = -(R^n, \delta_t e^n), \quad (20)$$

where

$$\begin{aligned} (g \frac{e^n - e^*}{\tau}, \delta_t e^n) &= \sum_{j=1}^{M-1} g_j \frac{e_j^n - e_j^*}{\tau} (\delta_t e_j^n) h, [d \delta_x \delta_t e^n, \delta_x \delta_t e^n] \geq d_0 \|\delta_x \delta_t e^n\|^2, \\ [a \delta_x e^n, \delta_x \delta_t e^n] &= [a \delta_x e^n, \delta_x \frac{e^n - e^{n-1}}{\tau}] \geq \frac{1}{2\tau} \{[a \delta_x e^n, \delta_x e^n] - [a \delta_x e^{n-1}, \delta_x e^{n-1}]\}, \\ |-(R^n, \delta_t e^n)| &\leq \varepsilon \|\delta_t e^n\|^2 + M_1 \|R^n\|^2. \end{aligned}$$

The difficulty is the estimate of first term in (20). Since

$$\begin{aligned} e_j^* &= u(x_*, t_*) - w(x_*, t_*) = u(x_*, t_*) - I_1 \{U_{j-1}^n, U_j^{n-1}\}(x_*, t_*) \\ &= u(x_*, t_*) - I_1 \{u(x_{j-1}, t_n), u(x_j, t_{n-1})\}(x_*, t_*) \\ &\quad + I_1 \{u(x_{j-1}, t_n), u(x_j, t_{n-1})\}(x_*, t_*) - I_1 \{U_{j-1}^n, U_j^{n-1}\}(x_*, t_*) \\ &= \bar{r}_j^n + I_1 \{e_{j-1}^n, e_j^{n-1}\}(x_*, t_*), \end{aligned} \quad (21)$$

where  $\bar{r}_j^n = u(x_*, t_*) - I_1 \{u(x_{j-1}, t_n), u(x_j, t_{n-1})\}(x_*, t_*)$ , from (15) and (21), we have:

$$\begin{aligned} g_j \frac{e_j^n - e_j^*}{\tau} &= g_j [e_j^n - \bar{r}_j^n - I_1 \{e_{j-1}^n, e_j^n\}(x_*, t_*)] / \tau \\ &= g_j [e_j^n - \bar{r}_j^n - \frac{b_j \tau}{c_j h + b_j \tau} e_{j-1}^n - \frac{c_j h}{c_j h + b_j \tau} e_j^{n-1}] / \tau \\ &= \frac{c_j h + b_j \tau}{\tau h} [\frac{b_j \tau}{c_j h + b_j \tau} (e_j^n - e_{j-1}^n) + \frac{c_j h}{c_j h + b_j \tau} (e_j^n - e_j^{n-1}) - \bar{r}_j^n] \\ &= \frac{b_j}{h} (e_j^n - e_{j-1}^n) + c_j \delta_t e_j^n - \frac{c_j h + b_j \tau}{\tau h} \bar{r}_j^n, \\ (g \frac{e^n - e^*}{\tau}, \delta_t e^n) &= (c \delta_t e^n, \delta_t e^n) + \sum_{j=1}^{M-1} b_j (e_j^n - e_{j-1}^n) \delta_t e_j^n - \sum_{j=1}^{M-1} \frac{c_j h + b_j \tau}{\tau} \bar{r}_j^n \delta_t e_j^n. \end{aligned} \quad (22)$$

Therefore

$$\begin{aligned} c_0 \|\delta_t e^n\|^2 + d_0 \|\delta_x \delta_t e^n\|^2 &+ \frac{1}{2\tau} \{[a \delta_x e^n, \delta_x e^n] - [a \delta_x e^{n-1}, \delta_x e^{n-1}]\} \\ &\leq \varepsilon \|\delta_t e^n\|^2 + M_1 \|R^n\|^2 \end{aligned}$$

$$+ \left| \sum_{j=1}^{M-1} b_j (e_j^n - e_{j-1}^n) \delta_t e_j^n \right| + \left| \sum_{j=1}^{M-1} \frac{c_j h + b_j \tau}{\tau} \bar{r}_j^n \delta_t e_j^n \right|. \quad (23)$$

We also need to estimate error term  $\bar{r}_j^n$  of the skew linear interpolation.

$$\begin{aligned} |\bar{r}_j^n| &= \left| u(x_*, t_*) - I_1 \{ u(x_{j-1}, t_n), u(x_j, t_{n-1}) \} (x_*, t_*) \right| \\ &= \frac{1}{2} \left| \left( \frac{\partial^2 u}{\partial \rho^2} \right)_{\bar{j}} \right| P_{-1} P_* |P_* Q_0| = \frac{1}{2} \frac{b_j \tau h (h^2 + \tau^2)}{(c_j h + b_j \tau)^2} \left| \frac{\partial^2 u}{\partial \rho^2} \right|_{\bar{j}}, \end{aligned} \quad (24)$$

where  $\rho$  denotes the direction of  $P_{-1} Q_0$ ,  $\left( \frac{\partial^2 u}{\partial \rho^2} \right)_{\bar{j}}$  denote the value at some point on segment  $\overline{P_{-1} Q_0}$  of second direction derivative along the direction of  $\overline{P_{-1} Q_0}$ . When  $h = O(\tau)$ , by (24), we have

$$\max_j |\bar{r}_j^n| \leq M_2 \max_{[x_{j-1}, x_j] \times [t_{n-1}, t_n]} \left| \frac{\partial^2 u}{\partial \rho^2} \right| h \tau, \quad (25)$$

where  $M_2$  is a positive constant. Notice that the boundedness of  $b(x)$ , apply (25) to (23),

$$\begin{aligned} &c_0 \|\delta_t e^n\|^2 + d_0 \|\delta_x \delta_t e^n\|^2 + \frac{1}{2\tau} \{ [a \delta_x e^n, \delta_x e^n] - [a \delta_x e^{n-1}, \delta_x e^{n-1}] \} \\ &\leq 3\varepsilon \|\delta_t e^n\|^2 + M_1 \|R^n\|^2 + C(\|\delta_x e^n\|^2 + \|g \bar{r}^n / \tau\|^2), \end{aligned}$$

where constant  $C$  depends on  $\varepsilon$ .

Multiply by  $2\tau$ , take  $\varepsilon = \frac{c_0}{8}$ , and sum for  $n$ , applying (18), (25), we have

$$\begin{aligned} &c_0 \sum_{m=1}^n \|\delta_t e^m\|^2 \tau + d_0 \sum_{m=1}^n \|\delta_x \delta_t e^m\|^2 \tau + a_0 \|\delta_x e^n\|^2 \\ &\leq M_1 L \{ K_1 \left\| \frac{\partial^2 u}{\partial \lambda^2} \right\|_{L^\infty(L^\infty)} + \|u\|_{W^{2,\infty}(W^{4,\infty})} \} (\tau + h^2) \}^2 \\ &+ C \{ \sum_{m=1}^n \|\delta_x e^m\|^2 \tau + L \max_j (c_j h + b_j \tau)^2 \cdot \max_{[x_{j-1}, x_j] \times [t_{n-1}, t_n]} \left| \frac{\partial^2 u}{\partial \rho^2} \right| \}^2. \end{aligned}$$

Denote  $\left\| \frac{\partial^2 u}{\partial \rho^2} \right\|_{L^\infty(L^\infty)} = \max_{[0,L] \times [0,T]} \left| \frac{\partial^2 u}{\partial \rho^2} \right|$ , notice that  $\|\delta_x e^n\| \leq \|\delta_x e^n\|$ , and then applying discrete Gronwall

inequality, we have

$$\begin{aligned} &(\sum_{m=1}^n \|\delta_t e^m\|^2 \tau)^{\frac{1}{2}} + (\sum_{m=1}^n \|\delta_x \delta_t e^m\|^2 \tau)^{\frac{1}{2}} + \|\delta_x e^n\| \\ &\leq M \{ \left\| \frac{\partial^2 u}{\partial \lambda^2} \right\|_{L^\infty(L^\infty)} + \|u\|_{W^{2,\infty}(W^{4,\infty})} \} (\tau + h^2) + \left\| \frac{\partial^2 u}{\partial \rho^2} \right\|_{L^\infty(L^\infty)} (\tau + h), \end{aligned} \quad (26)$$

where  $M$  is positive constant.

The upward discussion based on  $b_j > 0$ . When  $b_j < 0$ , similar discussions can also be made and establish the corresponding computational schemes.

**Theorem 1** Suppose that the solution of problem (1) satisfies

$$u \in W^{2,\infty}(W^{4,\infty}), \frac{\partial^2 u}{\partial \lambda^2}, \frac{\partial^2 u}{\partial \rho^2} \in L^\infty(L^\infty),$$

$\{U_j^n\}$  is the solution of skew linear interpolation characteristic difference scheme (10), then while  $h = O(\tau)$ , the error estimates satisfies (26).

**Remark** If  $d(x) \equiv 0$ , the problem (1) degenerate to a convection diffusion problem, the computation scheme (10) and the conclusion of theorem 1 also hold for convection diffusion equations.

## 5. Numerical examples

Consider following Sobolev equation:

$$\frac{\partial u}{\partial t} + \frac{\partial u}{\partial x} - \frac{\partial}{\partial x} \left( \frac{\partial u}{\partial x} + \frac{\partial^2 u}{\partial x \partial t} \right) = f(x, t), (x, t) \in [0, 1] \times (0, 0.99).$$

Take the solution of this equation to be:

$$u(x, t) = 10^{-16} e^{20(x+t)}.$$

The initial-boundary value conditions and  $f(x, t)$  be determined by solution  $u(x, t)$ . Solve this problem by using skew linear interpolation characteristic difference method (10) and the characteristic difference method given in [4], when  $h = \frac{1}{30}, \tau = \frac{1}{10}$ , we can compare the numerical result with the accurate solution.

For example, for  $t = 0.99$ , denote  $\text{err} = \left( \sum_{j=1}^M (u_j - U_j)^2 \right)^{\frac{1}{2}} h$  the average absolute errors, then the average absolute errors are 0.0212 and 0.0352 with respect to the two methods. Table 1 listed some results at certain grid points for  $t = 0.99$ :

Table 1. The numerical compare of finite difference schemes

$x$	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
$u$	2.935e-7	2.169e-6	1.603e-5	1.185e-4	8.749e-4	6.465e-3	4.777e-2	3.530e-1	2.609
LCD	2.932e-7	2.168e-6	1.614e-5	1.180e-4	8.753e-4	6.471e-3	4.781e-2	3.576e-1	2.621
SLCD	2.933e-7	2.170e-6	1.612e-5	1.182e-4	8.750e-4	6.467e-3	4.779e-2	3.538e-1	2.613

Computations show the skew linear interpolation characteristic difference method is an efficient algorithm, compared with [4], this method is more stable, and it is simpler than [5]. This method can also be used to solve convection diffusion equations with variable coefficients.

## 6. References

- [1] J. Douglas, V. Thomee. Superconvergence of a finite element approximation to the solution of a Sobolev equation in a single space variable. *Math. Comp.* 1981, **36**: 53-63.
- [2] W. H. Ford, T. W. Ting. Uniform error estimates for difference approximations to nonlinear pseudo-parabolic partial differential equations. *SIAM, J Numer. Anal.* 1974, **11**: 155-169.
- [3] J. Douglas, T. F. Russell. Numerical methods for convection-dominated diffusion problem based on combining the method of characteristics with finite element or finite difference procedures. *SIAM J Numer. Anal.* 1982, **19**(5): 871-885.
- [4] T. S. You. Characteristic difference method for nonlinear Sobolev equations. *Mathematica Numerica Sinica.* 1995, **1**: 487-500.
- [5] X. Q. Qin, Q. F. Li. A new characteristic difference method for convection diffusion equations. *Numer. Math.* 2004, **19**: 161-167.
- [6] A. Rigal. Numerical analysis of two-level finite difference schemes for unsteady diffusion-convection problems. *Int J Numer Method Eng.* 1989, **28**(2): 1001-1021.
- [7] R. E. Ewing. Time-stepping Galerkin methods for nonlinear Sobolev equations. *SIAM, J Num. Anal.* 1978, **15**: 1125-1150.
- [8] J. H. Bramble. A second order finite difference analog of the first biharmonic boundary value problem. *Numer. Math.* 1996, **4**: 236-249.

- [9] C. H. Wang and T. K. Wang. Extended local one-dimensional finite difference and finite element schemes for nonhomogeneous parabolic differential equations with nonhomogeneous boundary conditions. *Numer. Math.* 2006, **28** (2): 138-150.
- [10] W. Z. Dai and R. Nassar. A finite-difference scheme for solving the heat transport equation at the microscale. *Journal of Computational and Applied Mathematics*. 2001, **132**: 431-441.
- [11] J. Zhang and J. J. Zhao. Unconditionally stable finite difference scheme and iterative solution of 2D microscale heat transport equation. *Journal of Computational Physics*. 2001, **170**: 261-275.
- [12] J. T. Oden and J. N. Reddy. *An introduction to the mathematical theory of finite elements*. USA: John Wiley and Sons, Inc., 1976.
- [13] H. O. Kreiss and N. A. Petersson. A second order accurate embedded boundary method for the wave equation with dirichlet data. *SIAM J.Sci. Comput.* 2006, 27: 1141-1167.
- [14] H. O. Kreiss, N. A. Petersson and Yström. Difference approximations for the second order wave equations. *SIAM J. Num. Anal.* 2002, **40**:1940-1967.
- [15] A. J. Cheng. Stability and convergence of Douglas alternating-direction implicit scheme for plane heat transport equation. *Numer. Math.* 1998, **20**(3): 265-272.
- [16] X. L. Li and Z. Z. Sun. A compact alternate direct implicit difference method for the reaction diffusion equations with variable coefficients. *Numer. Math.* 2006, **28**(1): 83- 95.
- [17] W. D. Dai and R. Nassar. Compact ADI method for solving parabolic differential equations. *Numer Methods Partial Differential Equations*. 2002, **18**(2): 129-142.